

Investing in the Health of the Sound and the Future of Our Region

April 2023

Project Background


Seattle Public Utilities and King County Wastewater Treatment Division are building an underground storage tunnel to significantly reduce the amount of polluted stormwater and sewage that flows into the Lake Washington Ship Canal, Salmon Bay, and Lake Union from our sewer system during storms.

The tunnel is 2.7-miles long, running from Ballard to Wallingford, and approximately 18-ft, 10-in wide. It will temporarily hold more than 29 million gallons of sewage and stormwater during heavy rain. When the storm passes, the stored sewage and stormwater will be sent to King County's West Point Wastewater Treatment Plant.

East Ballard Site Elements

In spring 2020, Seattle Public Utilities and King County began work in East Ballard for the Ship Canal Water Quality Project. Work includes:

- Soil stabilization
- Building the new storage tunnel
- Building a drop shaft to carry sewage and stormwater into the new storage tunnel
- Installing new pipes and structures to convey polluted stormwater and sewage to the tunnel
- New underground structures to house mechanical and electrical equipment, and odor control

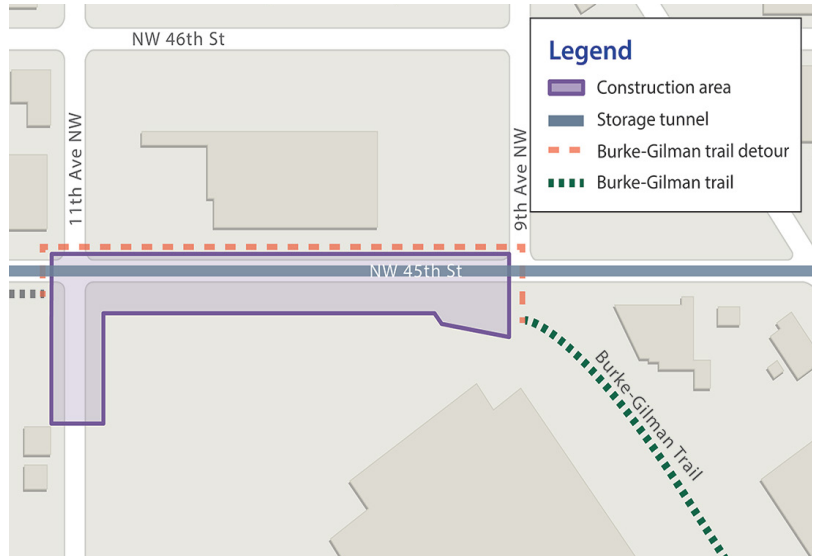

What to Expect During Construction

- Construction-related noise, traffic, dust, and vibrations
- The Burke-Gilman Trail will be detoured to the north side of NW 45th St
- Periodic traffic impacts to 11th Ave NW and NW 45th St, including one-lane and full-road closures, now through 2023
- Removal of some trees in the project area
- Possible nighttime work
- Increased truck traffic
- Parking restrictions

Contact

For questions or comments about this project:

Email: SPU_ShipCanalProject@seattle.gov

Call: 206-701-0233

Website: spushipcanal.participate.online

For interpretation services please call **206-386-9778**

如需要口譯服務 請撥電話號碼 **206-386-9778**


통역 서비스를 원하시면 **206-386-9778** 으로

Wixii turjubaan afka ah ku saabsan ,fadlan la soo xariir taleefoonka **206-386-9778**

Para servicios de interpretación por favor llame al **206-386-9778**

Para sa serbisyo ng tagapagpaliwanag tumawag sa **206-386-9778**

East Ballard schedule

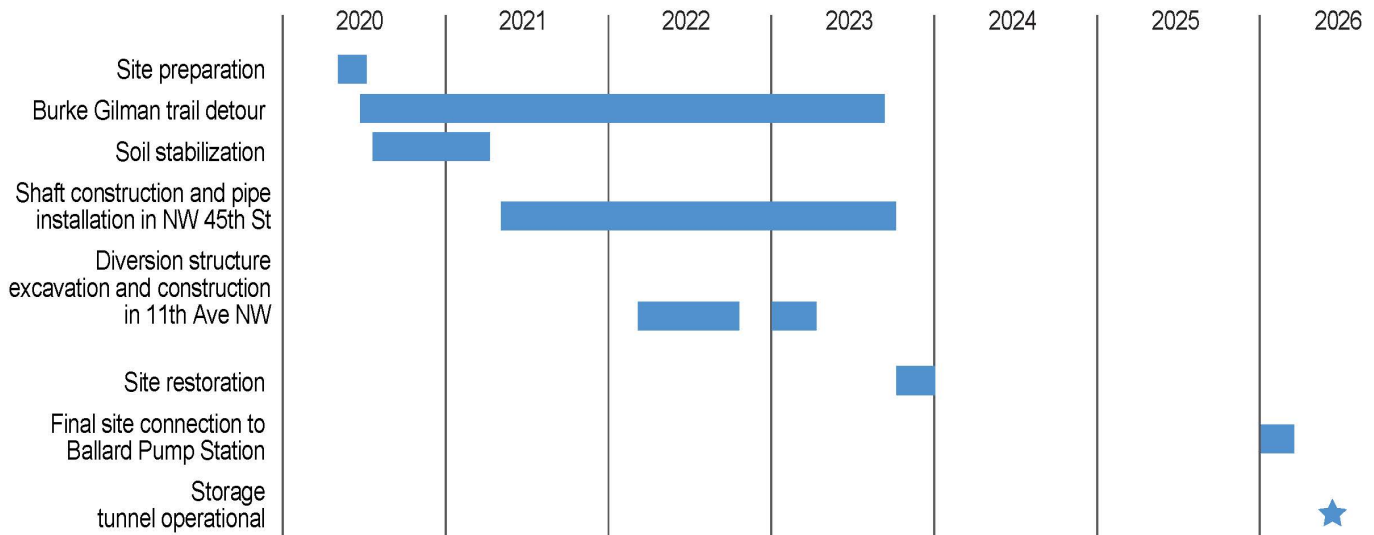

■ Construction

Updated April 2023

Some of the following photos are examples from other construction sites



Site Preparation

In spring 2020, crews mobilized to the work area and set up fences for the safety of crews and people nearby.



Soil Stabilization

After site set up, we began preparing the soil for underground construction using stabilization techniques (jet grouting, ground freezing, etc.).



Excavation & Construction

Crews dug beneath the surface to prepare and build underground structures that will be used to access the storage tunnel for operations and maintenance.



Diversion Structure Construction

Crews have begun excavating and building an underground diversion structure which will send untreated sewage and stormwater to the storage tunnel during heavy rains.



Site Restoration

Once construction is complete, all impacted areas will be restored to previous conditions. This will include landscape restoration and repaving streets and sidewalks.